

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
7 November 2002 (07.11.2002)

PCT

(10) International Publication Number  
**WO 02/088233 A1**

(51) International Patent Classification<sup>7</sup>: C08J 9/00,  
9/12, C08L 23/06 // (C08L 23/06, 97:02)

(74) Agents: SARA, Charles, S. et al.; DeWitt Ross & Stevens  
S.C., 8000 Excelsior Drive, Madison, WI 53717-1914  
(US).

(21) International Application Number: PCT/US02/13188

(22) International Filing Date: 26 April 2002 (26.04.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/286,848 26 April 2001 (26.04.2001) US

(71) Applicant (for all designated States except US): WASH-  
INGTON STATE UNIVERSITY RESEARCH FOUN-  
DATION [US/US]; 1610 NE Eastgate Boulevard, Pullman,  
WA 99163 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(72) Inventors; and

(75) Inventors/Applicants (for US only): DOSTAL, David,  
E. [US/US]; 1302 Becker Road, Colton, WA 99113 (US).  
WOLCOTT, Michael, P. [US/US]; 1078 Teare Road,  
Moscow, ID 83843 (US).



WO 02/088233 A1

(54) Title: LOW-DENSITY CELLULAR WOOD PLASTIC COMPOSITE AND PROCESS FOR FORMATION

(57) Abstract: A low-pressure CO<sub>2</sub> tank or an air compressor with a refrigerated air dryer is attached to the vent zone of a standard twin-screw extruder. During extrusion, the gas is dissolved in the wood-plastic melt. The CO<sub>2</sub> expands which foams the wood-plastic material.

**LOW-DENSITY CELLULAR WOOD PLASTIC COMPOSITE  
AND PROCESS FOR FORMATION**

**CORRESPONDING APPLICATION**

5        This patent application claims priority under 35 U.S.C. §119(e) to U.S. Provisional Patent Application Serial Number 60/286,848, entitled "Extrusion of Low-Density Cellular Wood Plastic Composite Using Low Pressure Injection of Carbon Dioxide and Moisture Vapor From Wood as the Blowing Agent, filed April 26, 2001, in the name of David F. Dostal and Michael P. Wolcott.

10        **FIELD OF THE INVENTION**

      The present invention is directed to an extruded cellular wood-plastic composite and a process for making the same. The present invention is specifically directed to an extruded wood-plastic composite of low density  
15        comprised of soft wood or hard wood flour and a thermoplastic resin produced by the introduction of carbon dioxide (CO<sub>2</sub>) gas, nitrogen (N<sub>2</sub>) gas, or air as physical blowing agents into the extrusion process at low pressure. The thermoplastic resin may be high-density polyethylene, polypropylene, or any other thermoplastic resin suitable for use in a wood-plastic composite. The wood plastic composite produced  
20        by this process may be in the form of homogeneous foam or a form in which a dense skin is formed around a cellular core.

25

### DESCRIPTION OF THE PRIOR ART

The current state of the art in the extrusion of cellular wood plastic composites produces cellular wood plastic composites containing poly-vinyl chloride (PVC), acrylonitrile butadiene styrene (ABS), polypropylene (PP), or polystyrene (PS) as the plastic resin. Foaming is accomplished through the use of chemical blowing agents that add an appreciable amount to the cost of the product. Significant weight reduction of the extruded material must be accomplished by the use of these blowing agents to offset the increased cost. The foams so produced are usually allowed to expand outward upon exiting from the die. The extruded profile is then shaped and sized by methods known to those practiced in the art. In an alternative process, the composite may be extruded as a hollow profile and allowed to expand or foam inward. The profile is contained in an appropriate device to maintain the extruded shape in this alternate process.

15

Carbon dioxide has been successfully utilized as a physical blowing agent in the foaming of low-density micro-cellular plastics in an extrusion process (Park, B. et al., "Low density microcellular foam processing in extrusion using CO<sub>2</sub>", *Polymer Engineering and Science*, p 1812, v.38, 1998). However, the process required injection of the blowing agent at high pressures, utilized high-impact polystyrene (HIPS) as the plastic resin, and did not involve a wood-plastic composite material. Extrusion processes using physical blowing agents, such as carbon dioxide, currently produce cellular plastic material made from high-density polyethylene (HDPE) and PP. However, the gas is introduced in high-pressure regions of the extruder and must be pumped into the extrusion at pressures between 1000 and 5000 psi.

20  
25

Strength and stiffness of wood plastic composites decreases when they are foamed. This decrease is generally inversely proportional to the density of the

foam. As a result, currently available elements such as deck boards are either of relatively high density ( $0.8 - 0.9 \text{ g/cm}^3$ ) or have a dense unfoamed, structural layer co-extruded on the outside of the foam. The co-extrusion process requires the use of a second extruder, which increases equipment costs.

5

### SUMMARY OF THE INVENTION

The present invention is directed to a cellular wood plastic composite comprised of soft wood flour and high-density polyethylene wherein the ratio of wood flour to high-density polyethylene ranges from 1:4 to 3:2.

10

The present invention is also directed to a process for forming a stable cellular wood plastic composite of low density comprising: mixing finely ground wood flour with plastic in an extruder to form a plasticated mixture; introducing a blowing agent into the plasticated material under pressure sufficient to drive the blowing agent into the plasticated mixture to form cells within the plasticated mixture, wherein the blowing agent is introduced under a pressure gradient in the extruder sufficient to increase the solubility of the blowing agent in the plasticated mixture and under a temperature sufficient to prevent collapse of the cells; and reducing the pressure prior to removing the plasticated mixture from the extruder.

20

The introduction of the physical blowing agent in the vent region of an extruder allows the gas to be injected at low pressures using only a simple two-stage pressure regulator. No pump is required and no high-pressure piping is necessary.

25

In this process, mixing finely ground wood flour with the plastic enhances the foaming process. The number of cells per unit volume of the foam is increased and the density of the foam is decreased. The wood flour enhances the foaming

process through two mechanisms with the first mechanism being the introduction of additional gases to the extrudate and the second being the altering of the viscosity of the extrudate. Residual moisture and other volatile gases are released from the wood during the extrusion process. These gases act as additional blowing agents. The wood flour also increases the viscosity of the extrudate. This allows the extrudate to be processed at higher melt pressures without these higher pressures causing back flow of the extrudate into the vent manifold of the extruder. The higher pressures allow the blowing agent to disperse throughout the resin more readily and more completely, resulting in improved cell structure and increased cell density.

The addition of wood flour decreases the cost of the material by displacing a more expensive ingredient (plastic resin) as well as increasing the stiffness of the foam. Therefore, an enhanced process to foam wood-plastic composites is accomplished.

One advantage of the present invention is that the expensive chemical blowing agent used in the prior art to produce a foamed wood-plastic composite is now replaced with a less-expensive physical blowing agent.

A second advantage is that a member may be produced with a dense outer layer and a foam core utilizing only one extruder. Additional advantages are the low cost method of introducing the blowing agent, the decreased cost of materials needed for production, and the increased stiffness of the product when compared to plastic foam.

The product may be used for decorative moldings inside or outside of a house, picture frames, furniture, porch decks, window molding, window

components, door components, and roofing systems. Other types of use are contemplated.

Reference is now made in detail to the preferred embodiments of the  
5 invention, examples of which are illustrated in the accompanying drawing.

### **DESCRIPTION OF DRAWING**

Fig. 1 is a flow chart illustrating the process of the invention.

### **DESCRIPTION OF THE INVENTION**

#### **Wood Flour:**

Wood flour with a particle size of 40 mesh or smaller derived from either hard or soft wood species may be used. Preferably the particle size is 60 mesh or smaller. The moisture content of the wood flour may vary from less than 1% to  
15 9%. Higher moisture content results in lower density foam but increases cell size and increases the presence of voids in the foam structure. Preferably for most applications the wood is dried to 1% moisture content. Drying technologies are known to the art. A suitable example is a desiccant dryer manufactured by Premier Pneumatics, Inc. (Allentown, PA.).

20 While wood flour is the preferred material for the present invention, it is within the scope of the present invention to use a variety of cellulosic materials from sawdust to pond sludge and newspapers. The cellulosic material may also be a raw material including old newspapers, alfalfa, wheat pulp, wood chips, wood  
25 flakes, wood fibers, ground wood, wood veneers, wood laminates, kenaf, paper, cardboard, straw, and other cellulosic fibrous materials.

Prior to being combined with the other starting materials, the cellulosic materials should be dried to moisture content between approximately 1% and 9%. Preferred moisture content is no more than 2%. Drying technologies are known to the art. A suitable example is a desiccant dryer manufactured by Premier  
5 Pneumatics, Inc. (Allentown, PA.).

#### Thermoplastic Materials:

The thermoplastic materials serve primarily as a process fluidizer. Most types of thermoplastic materials may be used, examples of which include multi-  
10 layer films, virgin thermoplastics such as polyethylene, polypropylene, poly-vinyl chloride (PVC), low density polyethylene (LDPE), ethyl-vinyl acetate and waste plastic sawdust from other industries as well as other recyclable polymer materials.

Thermoplastic materials are essential to the process of the present  
15 invention. The developing cells in the mixture are formed in the thermoplastic portion of the material matrix. Preferred types of thermoplastic materials that may be used are HDPE and PP. The ratio of cellulosic fibers to the thermoplastic material is between approximately 3:2 and 1:4. Preferably the ratio between the cellulosic fibers to the thermoplastic material is approximately 2:3.

20

#### Extruder

Reference is made to U.S. Patent 5,516,472 to *Laver*, which is incorporated herein by reference, for a description of a suitable extruder. An example is a Cincinnati Milacron E55 counter-rotating intermeshing twin-screw extruder with  
25 triple flights, which is used to produce the cellular material. It is possible to control the temperature of the extrudate by utilizing the temperature controllers for the four-barrel zones and the screws of the E55 twin-screw extruder. The openings in the vent manifold that normally hold the sight glasses are plugged by

covering them with a high temperature gasket and a 0.5 inch thick aluminum plate. The piping running from the vent manifold to the extruder vacuum system is modified by the addition of a ball valve on the vacuum line and a coupler (for connection of the CO<sub>2</sub> bottle or compressed air line) onto the vent manifold bleeder valve assembly.

#### Blowing Agent

Blowing agents are added to decrease density by creating small bubbles or cells in the material. The venting section of the screws provides an area for introduction of the blowing agent under low pressure. Carbon dioxide or nitrogen from a standard 50 pound gas bottle or compressed air produced by a common air compressor and dried by passing through a refrigerated air dryer is injected into the extruder barrel using a two-stage regulator in the case of the bottled gases or a single stage regulator in the case of the compressed air.

#### Other Additives

Other additives, as described in U.S. Patent 5,516,472 to *Laver*, can be included to achieve maximum commercialization of this product. Additives include cross-linking agents, lubricants, compatibilizers, and accelerators.

#### Operation

Referring now to Fig. 1, the basic principles of the present invention follow. Fig. 1 illustrates a twin-screw extruder 10, which is known to the art. The extruder provides many projections and grooves that knead the materials causing them to combine more completely. The extruder 10 includes a hopper 12 to receive and form a mixture of the wood flour and the thermoplastic material, the extruder body 14 for extruding the mixture; and a die 16 connected to the extruder.

Hopper: The mixing of the materials prior to loading the extruder 10 may be accomplished by any simple mixing device. No heat is required during mixing and only an even distribution of the various components is required. A drum  
5 tumbler may be used for small quantities or a larger batch-type mixer such as a ribbon blender known to the art may be used. A typical feed hopper 12 used in this process may be a gravity feed, starve feed or force-feed (also known as a "crammer") hopper, depending on the flow characteristics of the particular compound.

10

Extruder: The mixture of raw materials is then delivered to a heated extruder 14. The extruder 14 utilizes low temperature mixing and extruding. This is unique in that most plastic mixing processes require mixing at a plasticization temperature, which is quite high. The present mixing temperature is substantially  
15 lower, preferably around 340°F (171°C). The material passing through the mixing zone of the extruder creates a mass of homogenous material at a certain temperature, approximately 325°F (163°C) - 350°F (177°C) depending upon the particular compound.

20 The present invention can be processed with any capacity extruder. A counter-rotating and intermeshing twin screw, high pressure, extruder manufactured by Cincinnati Milacron (CM-55-HP) may be used in the preferred embodiment.

25 Preferably, the process is accomplished by twin-screw extruders, which are heated to process temperatures sufficient to blend the product together into a homogenous mixture at low temperature.

The temperature of the extrudate is controlled at a level that is 5 - 15°F (2.7-8.3°C) above the crystallization temperature of the thermoplastic. This prevents collapse of the product formed as will be described further on.

- 5        The temperature of the extruder used in the present invention is controlled by the extrusion speed, external extruder heaters, shearing action and heaters in the die system and monitored by thermocouples (not shown) and other monitoring circuits. The purpose of the thermocouples is to monitor the heat at each station.

10    Flow Rate:

The flow rate of the extruder 14 is typically between about 100 and 2500 pounds per hour. In the preferred embodiment the flow rate is approximately 300 pounds per hour with a temperature at approximately 270°F (132°C) - 325°F (163°C).

- 15        The product leaving the extruder is essentially unbounded round stock. Various sized extruder orifices are available with a range from 25 millimeters (mm) to 72mm. In the preferred embodiment a 38mm orifice is used.

- 20        As illustrated in Fig. 1, the extruder body 14 is segmented into four zones (zones 1, 2, 3 and 4). Zone 1 is the feed zone where the powdered or granular materials enter the flights of the screws from the hopper 12, via line 13. Heat applied from external sources and produced through shearing of the extrudate by the screws begins to melt the thermoplastic in this zone. In the preferred embodiment the temperature of this zone is maintained at 325°F (163°C). Zone 2
- 25    is the first metering zone. In this zone, a seal is formed between the extruder barrel and the screws, which restricts the transfer of pressures developed in the vent zone (zone 3) back to the feed zone (zone 1). The temperature of this zone in the preferred embodiment is 340°F (171°C). Zone 3 is the vent zone. Due to the

isolation of this zone by the seal formed in zone 2, positive or negative pressure may be maintained in the vent zone. In the preferred embodiment the blowing agent is present in this zone at a positive pressure of 60 psi and the temperature is maintained at 325°F (163°C). Zone 4 is the second metering zone. The screw flights in this zone are designed to provide a pumping action that is capable of forcing the extrudate through the die at pressures of 600 psi - 6000 psi. Blowing agent introduced in the vent zone is incorporated into the extrusion mass as a solute in zone 4. This zone also serves to cool the extrudate to a temperature suitable for production of cellular foam. In the preferred embodiment the temperature of zone 4 is maintained at 270°F (132°C). The temperature of the screws may also be controlled. In the preferred embodiment the screw temperature is maintained at 290 - 300°F (143 - 149°C).

The gaseous form of the blowing agent, typically CO<sub>2</sub> or air, which is located at unit 18, is injected into the extruder via line 19 typically at zone 3 under pressures of 40 psi to 500 psi, preferably under 200 psi, in the vent region of the extruder. The blowing agent and volatile gases given off by the wood flour are mixed with the plasticated material in zone 4 of the extruder under pressures of 1400 psi to 3800psi in order to drive them into solution. A pressure gradient is maintained in the extruder and die to increase the solubility of the blowing agent in the plastic. The temperature of the extrudate is controlled at a level that is 5 - 15°F (2.7 - 8.3°C) above the crystallization temperature of the thermoplastic. This prevents collapse of the cells formed when the blowing agent comes out of solution near the die exit. The pressure is released under a steep gradient, i.e., the pressure is reduced rapidly as the end of the die is approached and is completely released when the extrudate exits the die. The foam is allowed to expand outward as it exits the die producing a lightweight cellular product or alternatively is extruded as a hollow shape with the exterior being contained and

cooled to produce a dense strong skin while the foam is allowed to expand into and fill the interior of the shape.

#### Die Configurations

5           Two die configurations are preferred for foam production.

1.       The cellular material can be produced by foaming outward from a die of a size and length necessary for production of the required pressure drop. A die in the shape of a 3-inch by 0.5-inch slot with corner fillets 0.25 inch in radius was used. The length of the slot was 2.25 inches. Rigid foam with a density of 0.42 g/cm was  
10       produced from high-density polyethylene (HDPE) (Equistar LB 010000) using this configuration.

Cellular materials were then formed from composites containing HDPE and maple wood flour with the relative proportions being varied. Composites  
15       containing 20, 30, 40 and 50% wood by weight were successfully foamed. Foamed samples were selected at random from each category. Sample mass was measured on a digital electronic balance. Sample volume was determined by volume displacement of water. This method was used because of the irregular shape of a foam sample and the presence of voids in the material. The results are  
20       shown in Table 1. Production of low-density foams was possible with composites containing 20, 30, and 40% wood and medium density foam was produced with a composite containing 50% wood.

Table 1

Densities of Extruded Cellular Materials						
	Material					
	HDPE	1 % talc	20% maple	30% maple	40% maple	50% maple
sample density g/cm <sup>3</sup>	0.44	0.44	0.26	0.22	0.22	0.53
	0.41	0.42	0.23	0.29	0.23	0.54
	0.39	0.40	0.25	0.25	0.24	0.48
	0.42	0.43	0.25	0.28	0.23	0.44
	0.46	0.48	0.25	0.27	0.24	0.44
	0.42	0.44	0.22	0.27		0.46
average density	0.42	0.43	0.24	0.27	0.23	0.48

Subsequently a die was cut explicitly for the extrusion of wood plastic  
 5 composite foam. The densities of the foams produced from composites containing  
 40% wood using this die are presented in Table 2.

**Table 2****Densities of Cellular Materials Extruded with Differing****Moisture Levels and Blowing Agent**

5	Wood Moisture Content (%)*	Blowing Agent	Mean Density (g/cm <sup>3</sup> )	St.Dev.
	0.89%	None	0.954	0.043
		CO <sub>2</sub> 60 psi	0.409	0.031
10		CO <sub>2</sub> 100 psi	0.488	0.023
		CO <sub>2</sub> 160 psi	0.571	0.022
		Air 60 psi	0.525	0.060
		Air 100 psi	0.422	0.030
15	3.47%	None	0.616	0.126
		CO <sub>2</sub> 60 psi	0.302	0.035
		Air 100 psi	0.401	0.017
20	6.21%	None	0.325	0.021
		CO <sub>2</sub> 60 psi	0.254	0.017
		Air 100 psi	0.283	0.016
25	8.58%	None	0.323	0.019
		CO <sub>2</sub> 60 psi	0.260	0.067
		Air 100 psi	0.309	0.061

30

\*Wood level is 40%

35 The data presented in Table 2 illustrate the synergistic effect of the added blowing agent and the volatile compounds present in the wood flour. Wood flour added to the composites in this trial was either undried or dried at one of three specific temperatures. As a result four different wood moisture levels were tested. These were 8.58% (undried), 6.21% (dried at 150°F), 3.47% (dried at 235°F), and 0.89% (dried at 325°F). As seen in Table 2, the lowest foam densities are obtained

when adding CO<sub>2</sub> as an additional blowing agent, followed by adding air as an additional blowing agent. The effect of injection pressure on foam density varies with blowing agent. Increasing injection pressure of air causes a decrease in density while increasing injection pressure of CO<sub>2</sub> causes an increase in foam density. Use of volatile compounds from the wood alone results in the highest foam densities. Foam density also is seen to decrease as the wood moisture level increases. This data indicates that low foam densities may be achieved through the process described here and that the addition of wood flour to the plastic resin enhances the foaming process.

10

2. The cellular material can be produced by extrusion of the wood plastic composite through a die designed to produce a hollow profile. This type of die typically has a mandrel that forms the interior of the hollow. This type of die may be of the type described in U. S. Patent 5,516,472 to *Laver*. When this type of die is used, extruding the material through the stranding die develops the pressure needed for the incorporation of the blowing agent. The foam produced in this way can be allowed to expand freely or can be contained. If the foam is to be contained, a cooled calibrator whose inner surface matches the desired shape of the member is attached to the die so that the mandrel extends into the cavity of the calibrator. This results in the formation of a solidified skin on the exterior of the composite that has not been allowed to foam. The interior of the profile is not yet solidified when the extrudate reaches the end of the mandrel. This material is allowed to foam into the interior of the profile creating a solid foam core surrounded by an unfoamed skin. The profiles produced in this manner may be made in intricate shapes. The skin thickness and profile dimensions can be designed so that a member suitable for use as a deck board may be produced.

15

20

25

#### Sample Embodiment 1

To investigate the properties of foam core composites that could be produced, laminates were made with outer flanges of high density wood-plastic composite

material with a foam block melt bonded between them. Both the foam block and high-density flanges were heated on a platen of a hot press set at 170°C for two minutes. The two heated surfaces were then pressed together for two minutes. Specimens were allowed to cool to room temperature overnight and were tested in flexure. Two types of specimens were made and tested. One type was made from foam containing 20% wood and the other from foam containing 30% wood. The flanges for both types were made from a formulation containing 58% wood, 31% HDPE, 8% talc, 2% zinc stearate, and 1% EBS wax.

10       The specimens made from 20% wood foam were broken in flexure on a mechanical type universal testing machine (United Model SFM-10, Huntington Beach, CA). An automated testing procedure was used which uses deflection control and halts the test when a reduction in load occurs. For the 20% wood foam samples, the test stopped when the bottom flange failed. No failure had occurred in  
15       the foam core this time.

          The specimens were then rotated and tested with the other flange in tension. The results show a reduction in stiffness for the second test but no difference in strength. The 30% wood core foam specimens were broken in flexure on an Instron  
20       Model 4466 (Canton, MA) mechanical type universal testing machine. Failure of the foam core resulted simultaneously with failure of the bottom flange for the specimens. Twelve specimens were tested but four delaminated and data from those were not used. Mechanical properties of the 20% foam core laminates, the 20% foam core laminates broken from the second side, the 30% foam core laminates, and  
25       the control 2-box section are presented in Table 3.

Table 3

		Density (lb.ft-3)	Modulus (psi)	EI(lb-in <sup>2</sup> )	Rupture (psi)	Strain at failure	Hyperbolic Modulus (psi)
Control	Average	30.629	298686	233878	1570	0.010	321238
	Standard deviation	0.253	7184	2906	23	0.000	8829
	Coefficient of variation	0.8%	2.4%	1.2%	1.5%	3.2%	2.7%
20% Wood Foam Laminate	Average	37.032	216064	179768	1304	0.011	231503
	Standard deviation	0.765	17962	13940	136	0.002	21708
	Coefficient of variation	2.1%	8.3%	7.8%	10.4%	20.3%	9.4%
20% Wood Foam Laminate	Average	37.032	154916	129661	1357	0.015	160396
	Standard deviation	0.765	18080	15581	58	0.000	20431
	Coefficient of variation	2.1%	11.7%	12.0%	4.3%	2.8%	12.7%
30% Wood Foam Laminate	Average	36.987	255175	180068	1528	0.013	262407
	Standard deviation	1.887	33802	25113	147	0.001	35414
	Coefficient of variation	5.1%	13.2%	13.9%	9.6%	8.2%	13.5%

These values indicate that a laminate produced by co extrusion of high density wood-plastic composite with a cellular wood plastic core will perform in a manner similar to a hollow net section of the high density material when loaded in flexure. The foam core will add  
5 resistance to impact and buckling not present in the net section.

Members were produced by both extrusion and co-extrusion processes through the foaming process described above using die configuration 2 in which the profile is contained as it is cooled. The  
10 members produced by co-extrusion are referred to as laminated members in the following paragraphs. The flanges for the laminated members were made from a formulation containing 58% wood, 31% HDPE, 8% talc, 2% zinc stearate, and 1% EBS wax. The formulation of the foam core material was 60% HDPE and 40% wood fiber. The  
15 same 60% - 40% formulation was used in the production of cellular composite members produced by simple extrusion (without high density flanges).

A laminated member consisting of high-density wood-plastic  
20 composite flanges with a foam core was produced by co-extrusion of the two materials. The member was produced with a 2 inch wide by 6 inch deep cross section made up of a high density wood-plastic composite flange 2 inch wide by 0.9 inch deep on the top and bottom of the section with a 2 inch by 4.2 inch foam core between the two  
25 flanges. The foam core contained 40% wood fiber in this instance. Members with this profile were tested according to ASTM standard D6109 "Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastic Lumber" test method "B", edgewise testing. Data from this test are presented in Table 4.

30

**Table 4**  
**Stiffness and Strength of Composite Joist Members**

Specimen #	Composite Density lbs/ft <sup>3</sup>	Composite I (in <sup>4</sup> )	Composite MOE (psi)	Composite EI (lb-in <sup>2</sup> )	Composite MOR (psi)
1	39.60	33.07	399990	13227795	1484
2	39.69	33.07	353125	11677957	1326
3	41.03	33.07	376295	12444173	1360
4	38.96	33.07	359077	11874778	1281
5	40.12	33.07	386136	12769613	1332
6	40.30	33.07	388896	12860884	1324
7	39.25	33.07	372962	12333941	1245
8	40.38	33.07	386320	12775699	1308
9	40.38	33.07	387608	12818306	1321
Average	39.97		378934	12531462	1331
STDEV	0.6465501		15113.232	499798.8	66.1
COV	1.62%		3.99%	3.99%	4.97%

- 5           A laminated member was co-extruded with a profile 5.5 inch wide by 1.4 inch deep consisting of a high-density wood-plastic composite flange 5.5 inch wide by 0.2 inch deep on the top and bottom with a foam core 5.5 inch wide by 1.0 inch deep between the two flanges. The foam core again contained 40% wood fiber. This
- 10   profile was tested according to ASTM standard D6109 test method "A", flatwise testing. This configuration simulates use as decking material. Results of this test are shown in Table 5.

**Table 5**  
**Stiffness and Strength of Composite Deck Members**

Specimen #	Composite Density lbs/ft <sup>3</sup>	Composite I (in <sup>4</sup> )	Composite MOE (psi)	Composite EI (lb-in <sup>2</sup> )	Composite MOR (psi)
1	37.8	1.31	386979	505493	1793
2	39.7	1.21	333147	403909	1489
3	38.8	1.87	310653	579478	1424
4	42.2	1.22	362221	441411	1312
5	39.3	1.20	358992	431874	1660
6	37.7	1.32	385298	506917	1659
7	41.2	2.27	340056	771111	1692
8	40.8	2.15	366480	788590	1682
9	37.1	1.40	340098	476823	1800
10	36.4	1.92	277485	531545	1409
Average	39.1	1.6	346140.9	543715.2	1592.0
STDEV	1.9	0.4	33753.7	134540.4	170.5
COV	4.9%	26.4%	9.8%	24.7%	10.7%

5

The data presented in Tables 4 and 5 show that the foaming process described above may be used in a co-extrusion process to produce a wood plastic composite member with properties suitable for some structural applications. Furthermore the composite density of this member is comparable to solid wood (20 to 45 lb/ft<sup>3</sup>).

10

A member with a cross section 5.5 inch wide by 1 inch deep was produced by extrusion of cellular wood plastic composite through the process described above using die configuration 2. Use of this die configuration results in the formation of a dense skin on the surface of the profile. This skin adds strength and stiffness to the member. This profile was tested according to ASTM standard D6109, test method "A", flatwise testing. Results of this test are shown in Table 6.

15

**Table 6**  
**Stiffness and Strength of Cellular Composite Member**

Specimen No.	Density (lb.ft <sup>3</sup> )	MOE (psi)	MOR (psi)
1	31.7	133909	1421
2	28.3	125707	1357
3	33.6	178323	1585
4	34.2	160698	1667
5	28.4	157008	1325
6	27.3	127933	1271
7	32.4	164235	1723
8	31.3	182532	1728
9	28.1	120159	1220
10	29.8	136593	1536
Average	30.5	148709.7	1483.3
STDEV	2.5	22648.1	189.5
COV	8.1%	15.2%	12.8%

5

Testing was done according to ASTM standard D790, "Standard Test Methods for Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials." Results of this test are shown in Table 7.

10

**Table 7**  
**Flexural Properties of Decorative Molding**

Specimen no.	Density (lb.ft <sup>3</sup> )	MOE (psi)	MOR (psi)
1	38.2	204461	2266
2	38.0	215264	2204
3	38.0	222622	2273
4	36.8	205046	2057
5	37.6	216388	2145
6	37.5	218943	2171
7	37.6	179916	2217
8	39.3	187471	2316
9	37.0	188736	2182
10	37.9	190002	2158
Average	37.8	202885	2199
STDEV	0.7	15353	74
COV	1.8%	7.6%	3.4%

5

Tables 6 and 7 show that the low pressure foaming process may be used to produce members having a density within the range of natural solid wood that have sufficient material properties for use as building materials. Furthermore, the low-pressure foaming process may be used to produce intricate and decorative shapes with the outward appearance of finished natural wood.

It is understood that the invention is not confined to the particular construction and arrangement of parts herein illustrated and described, but embraces such modified forms thereof as come within the scope of the following claims.

## CLAIMS

What is claimed is:

- 5 1. A cellular wood plastic composite comprised of soft wood flour and high-density polyethylene wherein the ratio of wood flour to high-density polyethylene ranges from 1:4 to 3:2.
2. The cellular wood plastic composite of claim 1 in which the  
10 wood flour comprises wood from the hardwood species.
3. A process for forming a stable cellular wood plastic composite of low density comprising:
  - 15 a. mixing finely ground wood flour with plastic in an extruder to form a plasticated mixture;
  - b. introducing a blowing agent into the plasticated material under low pressure
  - 20 c. Subsequently developing sufficient pressure to drive the blowing agent into the plasticated mixture to form cells within the plasticated mixture, wherein the blowing agent is incorporated under a pressure gradient in the extruder sufficient to increase the solubility of the blowing agent in the plasticated mixture and under a temperature sufficient to prevent collapse of the cells; and
  - 25 d. reducing the pressure prior to removing the plasticated mixture from the extruder.
4. The process of claim 3 wherein the wood flour is selected from the group consisting of wood flour, sawdust, pond sludge, newspapers,  
30 alfalfa, wheat pulp, wood chips, wood flakes, wood fibers, ground wood, wood veneers, wood laminates, kenaf, paper, cardboard, and straw.

5. The process of claim 4 wherein the wood flour is selected from hard and soft wood.
6. The process of claim 5 wherein the wood flour has a particle size no greater than about 40 mesh.
7. The process of claim 5 wherein the wood flour has a particle size no greater than about 60 mesh.
8. The process of claim 5 wherein the moisture content of the wood flour is between about 1% and 9%.
9. The process of claim 5 wherein the moisture content of the wood flour is no more than about 2%.
10. The process of claim 3 wherein the thermoplastic materials are selected from the group consisting of polyethylene, polypropylene, polyvinyl chloride, low-density polyethylene, ethyl-vinyl acetate and waste plastic sawdust.
11. The process of claim 3 wherein the thermoplastic materials are selected from the group consisting of high-density polyethylene and polypropylene.
12. The process of claim 3 wherein the ratio of wood fibers to the thermoplastic material is between approximately 3:2 and 1:4.
13. The process of claim 3 wherein the ration of wood fibers to the thermoplastic material is approximately 2:3.
14. The process of claim 3 wherein the blowing agent is selected from the group consisting of air and carbon dioxide.

15. The process of claim 3 wherein the blowing agent is carbon dioxide.

16. The process of claim 3, wherein the pressure gradient is  
5 between 1400 psi and 3800psi.

17. The process of claim 3, where the temperature of the extrudate is controlled at a level between about 5 and 15 °F (2.7 and 8.3°C) above the crystallization temperature of the plasticated mixture.


10

18. The process of claim 3 wherein the blowing agent is introduced into the plasticated material under pressures between 40 and 200 psi.

19. The process of claim 3 in which the blowing agent is dried,  
15 compressed air.

20

1/1

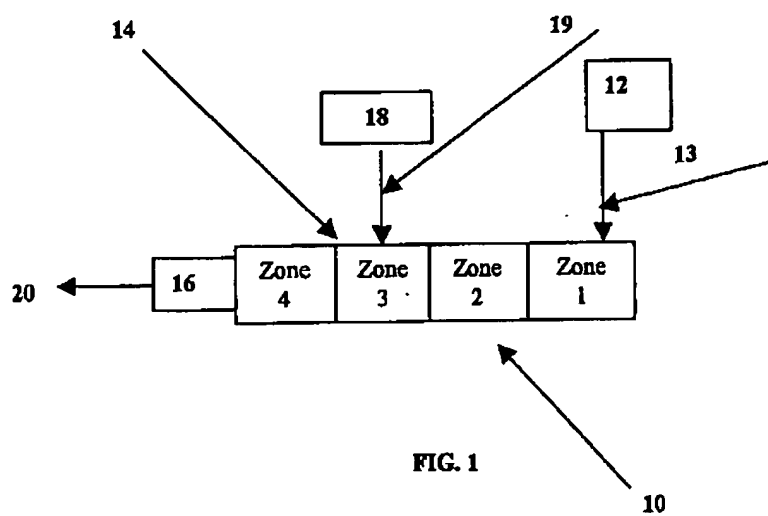

## INTERNATIONAL SEARCH REPORT

Int. Patent Application No.

PCT/US 02/13188

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 C08J9/00 C08J9/12 C08L23/06 //(C08L23/06,97:02)

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

CHEM ABS Data, WPI Data, PAJ, EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE CA 'Online! CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; KOGUCHI, TAKAYOSHI ET AL: "Synthetic wood materials with improved night visibility" retrieved from STN Database accession no. 130:283130 CA XP002207475 abstract & JP 11 080400 A (SEKISUI JUSHI CO., LTD., JAPAN) 26 March 1999 (1999-03-26) --- -/-	1,2

☒ Further documents are listed in the continuation of box C.☐ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*S\* document member of the same patent family

Date of the actual completion of the international search

25 July 2002

Date of mailing of the international search report

09/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Hoffmann, K

## INTERNATIONAL SEARCH REPORT

Inventor's Application No.

PCT/US 02/13188

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DATABASE CA 'Online! CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; KATSUBU, TORAICHI: "Manufacture of lightweight ethylene polymer foams" retrieved from STN Database accession no. 133:164949 CA XP002207476 abstract & JP 2000 225638 A (ASAHI CHEMICAL INDUSTRY CO., LTD., JAPAN) 15 August 2000 (2000-08-15) -----	1,2
X	DATABASE CA 'Online! CHEMICAL ABSTRACTS SERVICE, COLUMBUS, OHIO, US; DOROUDIANI, S. ET AL: "Structure and mechanical properties study of foamed wood fiber/polyethylene composites" retrieved from STN Database accession no. 127:66547 CA XP002207477	1,2
A	abstract & ANNUAL TECHNICAL CONFERENCE - SOCIETY OF PLASTICS ENGINEERS (1997), 55TH(VOL. 2), 2046-2050 , 1997, -----	3-19

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inventor's name  
Original Application No

PLI/US 02/13188

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 11080400	A	26-03-1999	NONE
JP 2000225638	A	15-08-2000	NONE